



OCF-S101G-0013-B10S-AAE



Product Description

POSITAL IXARC absolute Zone 2 & 22 encoder: SSI with Preset interface, Blind Hollow, $\varnothing$ 58 mm (B), $\varnothing$ 10 mm (0.39") shaft and IP67 protection class.

INTERFACE



Interface	SSI with Preset
-----------	-----------------

Manual Functions	Preset + complement via cable or connector
------------------	--

Interface Cycle Time	$\geq 25 \mu\text{s}$
----------------------	-----------------------

OUTPUTS



Output Driver	RS422
---------------	-------

ELECTRICAL DATA



Supply Voltage	4.5 – 30 VDC
----------------	--------------

Power Consumption	≤ 1.5 W
-------------------	---------

Start-Up Time	< 1 s
---------------	-------

Clock Input	RS 422, via Optocoupler
-------------	-------------------------

Clock Frequency	100 kHz – 2 MHz
-----------------	-----------------

Reverse Polarity Protection	Yes
-----------------------------	-----

Short Circuit Protection	Yes
--------------------------	-----

EMC: Emitted Interference	DIN EN 61000-6-4
---------------------------	------------------

EMC: Noise Immunity	DIN EN 61000-6-2
---------------------	------------------

MTTF	16.2 years @ 40 °C
------	--------------------

SENSOR



Technology	Optical
------------	---------

Resolution Singleturn	13 bit
-----------------------	--------

Accuracy (INL)	±0.0220° (14 – 16 bit), ±0.0439° (≤13 bit)
----------------	--

Sense Signal (Default)	Clockwise shaft movement (front view on shaft)
------------------------	--

Code	Gray
------	------

ENVIRONMENTAL SPECIFICATIONS



Protection Class (Shaft)	IP66/IP67
--------------------------	-----------

Protection Class (Housing)	IP66/IP67
----------------------------	-----------

Min Temperature	-30 °C fixed (-22 °F), -5 °C flexible (+23 °F)
-----------------	--

Max Temperature	+80 °C (+176 °F)
-----------------	------------------

Humidity	98% RH, no condensation
----------	-------------------------

MECHANICAL DATA

Housing Material	Steel
Housing Coating	Wet coating (RAL 9006 White Aluminium) + Cathodic corrosion protection (>720 h salt spray resistance)
Flange Type	Blind Hollow, ø 58 mm (B)
Flange Material	Aluminum
Shaft Type	Blind Hollow, Depth = 30 mm
Shaft Diameter	ø 10 mm (0.39")
Shaft Material	Stainless Steel V2A (1.4305, 303)
Rotor Inertia	$\leq 30 \text{ gcm}^2$ [$\leq 0.17 \text{ oz-in}^2$]
Friction Torque	$\leq 5 \text{ Ncm}$ @ 20 °C, (7.1 oz-in @ 68 °F)
Max. Permissible Mechanical Speed	$\leq 3000 \text{ 1/min}$
Shock Resistance	$\leq 100 \text{ g}$ (half sine 6 ms, EN 60068-2-27)
Permanent Shock Resistance	$\leq 10 \text{ g}$ (half sine 16 ms, EN 60068-2-29)
Vibration Resistance	$\leq 10 \text{ g}$ (10 Hz - 1000 Hz, EN 60068-2-6)
Weight	1305 g (2.88 lb)
Maximum Axial / Radial Misalignment	Static $\pm 0.3 \text{ mm}$ / $\pm 0.5 \text{ mm}$; Dynamic $\pm 0.1 \text{ mm}$ / $\pm 0.2 \text{ mm}$

ELECTRICAL CONNECTION



Connection Orientation	Axial
------------------------	-------

Cable Length	10 m [394"]
--------------	-------------

Wire Cross Section	0.14 mm ² / AWG 26
--------------------	-------------------------------

Material / Type	PVC
-----------------	-----

Cable Diameter	6 mm (0.24 in)
----------------	----------------

Minimum Bend Radius	46 mm (1.81") fixed, 61 mm (2.4") flexing
---------------------	---

CERTIFICATION



Approval	CE + ATEX Zone 2 & 22
----------	-----------------------

PRODUCT LIFE CYCLE




Product Life Cycle	Established
--------------------	-------------

Connection Plan


Signal	Color
Power Supply	Brown
GND	White
Data+	Gray
Data-	Pink
Clock+	Green
Clock-	Yellow
Preset	Blue
DIR	Red
Shielding	Shield

Drawings

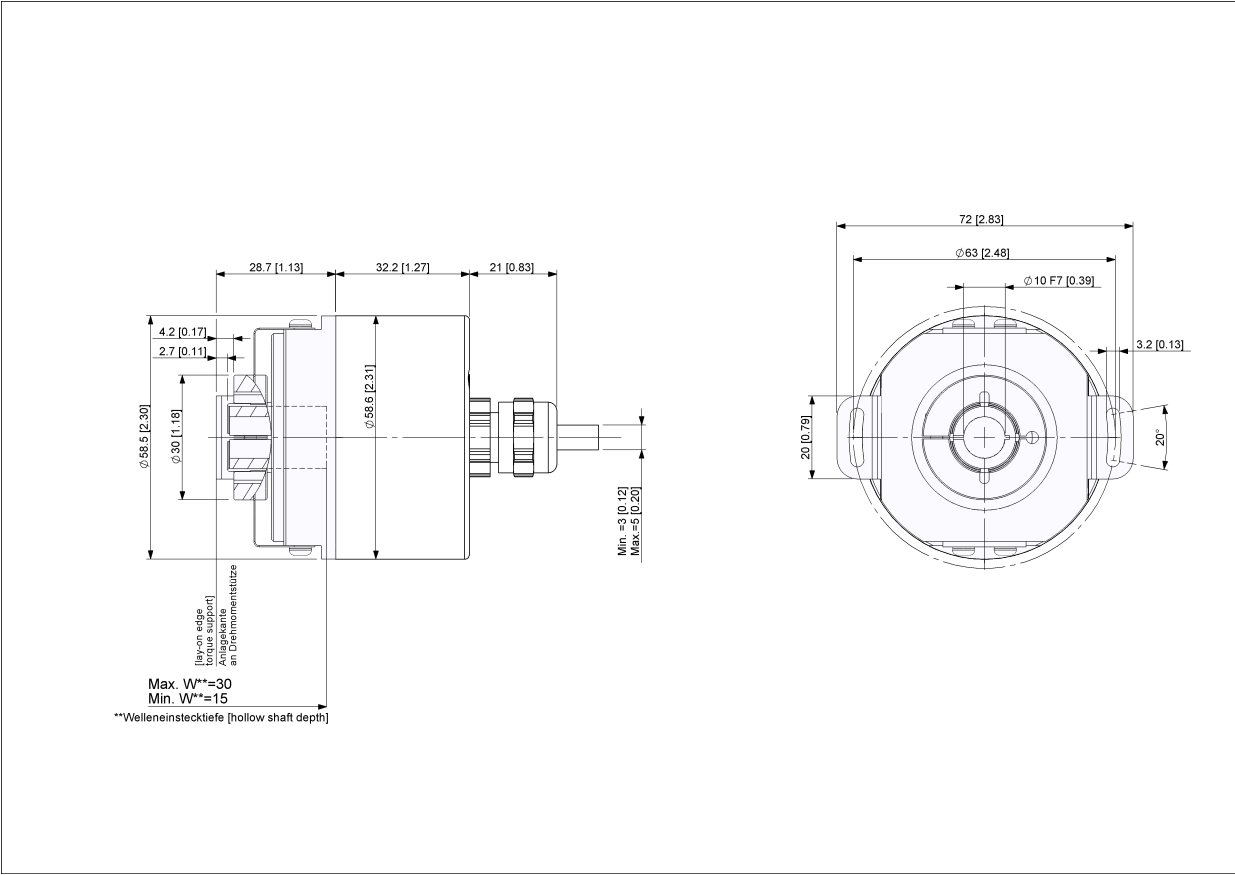

Configuration Picture

The Preset function allows to set the output value to zero at the present mechanical position.
Input resistance is 110 kΩ

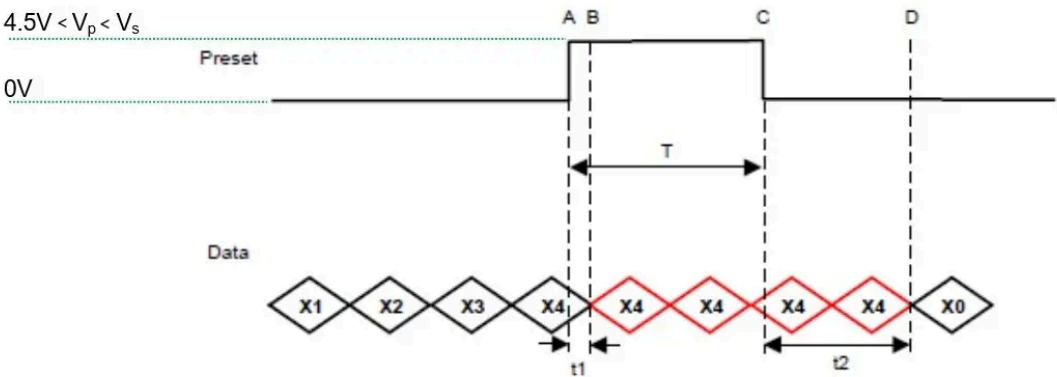

T = 103msec +/- 2msec
t1 = 3msec +/- 2msec
T+t2 = 225msec (+/- 13msec)

Configuration Picture

The DIR-function allows to change the encoder counting direction.

0 (open or GND)	Increasing Values Turning Clockwise (Viewed from Flange Side)
1 (4.5 V to Vs)	Decreasing Values Turning Clockwise (Viewed from Flange Side)
Input Resistance	60 kΩ

Online Datasheet

